22

SIRAIF

SIGMON White Edition

Bulit in Wifi - 3 in 1 Filter

Inverter Midwall Split Airconditioner

SIR/IR® Engineered for Comfort

www.sirair.co.za

WIFI CONTROL

Sirair smart air conditioners can be controlled or scheduled from your phone, no matter where you are. They are also compatible with Amazon Echo, Google Home smart-home systems, and Smart TVs, allowing you to control your AC using voice commands, which enhances convenience and makes your life smarter.



TECHNOLOGY



Control Your AC From Anywhere

Sirair's smart air conditioning system is a cloud service designed to serve customers worldwide. Through this cloud service, users can easily control their home cooling systems with a single click, enabling them to enjoy the benefits of a more intelligent lifestyle. The intelligent cloud service strategically places server groups in multiple regions across the globe, automatically matching users with servers in their respective areas. With the support of global DNS and CDN accelerators, users can experience fast cloud browsing.



Voice Control

Sirair's smart WiFi technologies are compatible with your smartphones and Al speakers, such as Google Assistant or Amazon Alexa, enhancing the intelligence of your daily life. You can now enjoy easy voice control for all your air conditioners.







AC Clean







Self-clean

58° Self-clean

Mildew Pr

Air Quality






3 in 1 Filter


High Density Filter



Self-clean technology can removes traps the dust and dirt that lands on the heat exchanger, and improves your indoor air quality.

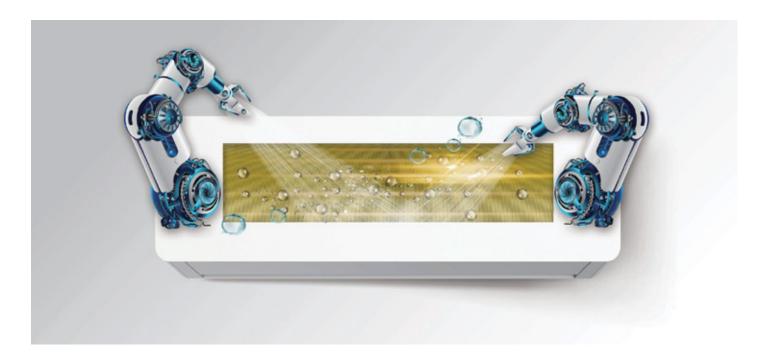

TECHNOLOGY



Hydrophilic Coated Film

The hydrophilic coating is better suited for dust removal and can also enhance the corrosion resistance of the heat exchanger.



Cold Expansion Technology

When the self-cleaning mode is activated with a single button press, the evaporator's surface is rapidly cooled, causing frost to form and generate a powerful cold expansion force, which effectively removes dirt. Subsequently, the frost quickly melts and is washed away, leaving the evaporator clean and dry.


- · Self-cleaning technology can effectively remove accumulated dirt from the evaporator, thereby enhancing heat exchange efficiency to ensure that the air conditioner operates in a better cooling condition.
- · Save cleaning cost.

▼ 58° SELF-CLEAN

58 °Self-cleaning can maintain the air conditioner in its optimal condition and effectively eliminate bacteria and viruses from the evaporator, ensuring the purity of the air.



TECHNOLOGY





Step 1Condensation



Step 2 Frosting



Step 3Defrosting and Flushing



Step 4
58° drying
and sterilization

58°C High Temperature Sterilization


After the evaporator surface condenses, it rapidly cools down, causing frost to form and generating a powerful cold expansion force that removes dirt, defrosts the surface, and washes it. Subsequently, the air conditioner rapidly heats up, with the highest temperature reaching 58°. The evaporator is then dried, and high-temperature disinfection and sterilization are performed.

- \cdot Eradicate bacteria and viruses by heating the evaporator to a high temperature of 58°C, thus purifying the air.
- · Maintain the cleanliness of the evaporator and reduce cleaning expenses.



MILDEW PROOF

Water may still remain in the unit after turning off the air conditioner. With Sirair's mildew-proof technology, when the air conditioner is turned off, the fan continues to run for 3 minutes to dry the evaporator and prevent mildew in the unit.

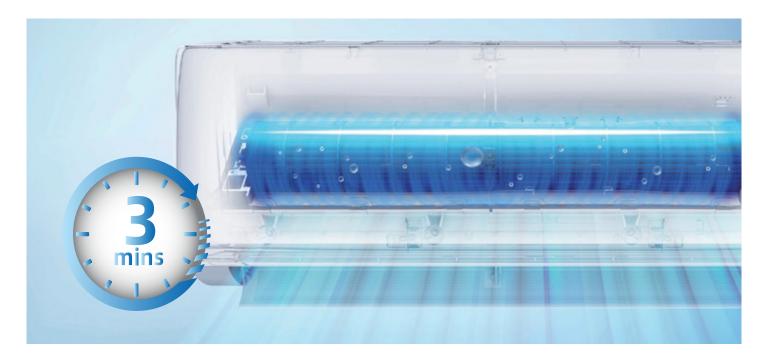

TECHNOLOGY



- · Prevent moisture from corroding the interior of the air conditioner and extend the service life of the heat exchanger.
- · Effectively prevent the growth of mold and keep the air clean.






Filters are a crucial component of your air conditioner. Not only do filters help clean and purify the air circulating in your home, but they also prevent contamination of the air conditioner.



3 IN 1 Filter & High Density Filter

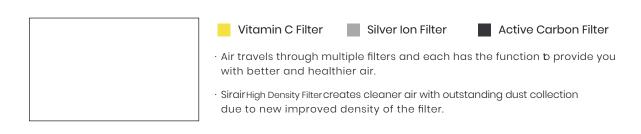

- · Purify the air, reducing air born particles and can lower the number of allergens in your home.
- · Protection for your air conditioner to keep it running properly, longer.







Energy Saving & Comfort











W Standby Turbo Mode

Sleep Mode

Quiet Mode

DC Inverter







Fast Cooling



Wide Voltage

ENERGY SAVING




TECHNOLOGY



ECO Mode

When the ECO mode is activated, the air conditioner will restrict the power input to conserve energy and enhance the unit's cost-effectiveness. This offers a significant advantage for users seeking a comfortable cooling experience without concerns about operating costs.



0.5w Standby


The utilization of digital green power design, an industry-leading standby chip, and an intermittent oscillation mode is employed to minimize AC standby power consumption to 0.5W.

DC INVERTER

Sirair's DC inverter technology enhances the accuracy of air conditioner temperature control, resulting in faster cooling and quieter operation.




TECHNOLOGY

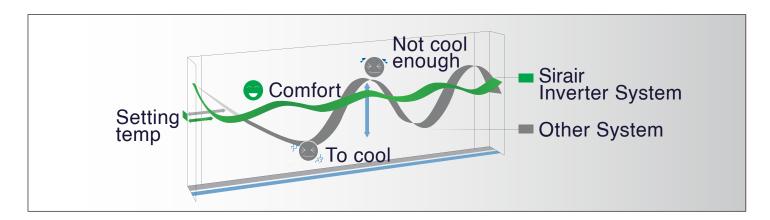

180° Sine Wave Control


Sirair's DC inverter air conditioner incorporates the benchmark technology of 180° sine wave control technology. When compared to the 120° square wave technology, it offers superior efficiency, lower energy consumption, and enhanced stability and reliability.

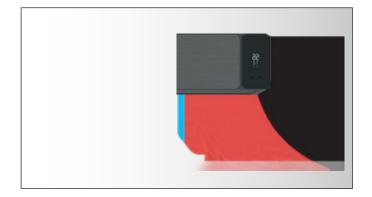

Fast Cooling & Heating

The Sirair DC inverter air conditioner features a broad frequency conversion range, allowing it to cool at six times the standard speed and heat at nine times the standard speed. Upon activation, it can engage the compressor and turbo in high-frequency operation, achieving the maximum operational speed and quickly reaching the maximum cooling or heating capacity.

RELIABILITY

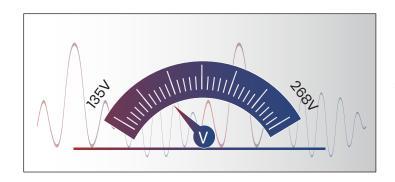

Wide Voltage Range

The Sirair inverter air conditioner features a wide voltage range of 135v-268v, making it suitable for regions with unstable power supply.

BENEFITS

· User Comfort

The DC Inverter Compressor's speed is continuously adjusted and varied to maintain the desired temperature with minimal fluctuations.

· Energy Saving

Sirair's DC Inverter Technology minimizes energy loss and maintains high efficiency levels, making it more efficient.



COMFORT AIRFLOW



TECHNOLOGY



Turbo

With this function, the air conditioner will maximize its cooling and heating capacity output, allowing the room to cool down or heat up more rapidly, and achieve the desired temperature in the shortest amount of time



Sleep Mode

In sleep mode, the indoor unit decreases the fan speed and turns off the display light to prevent light and noise from disrupting the user's sleep, creating a favorable environment for a restful night's sleep.



3D Airflow

The louvers on the Sirair air conditioner can automatically swing both vertically and horizontally, allowing for a precise and wide-ranging control of the wind direction, which ensures even and widespread cooling.

Health



Mildew Proof

Water may still be present in the unit after the air conditioner is turned off. Thanks to CHANGHONG's mildew-proof technology, when the air conditioner is powered down, the fan continues to run for 3 minutes to dry the evaporator and the fan, effectively preventing mildew growth within the unit.



High Density

Sirair's High-Density Filter produces cleaner air with exceptional dust collection capabilities, thanks to its newly improved filter density



Self-clean

When the self-cleaning function is activated with a single button press, the surface of the evaporator rapidly cools, causing frost to form and generating a strong cold expansion force that removes dirt. Subsequently, the frost rapidly melts, is washed away, and the drying process leaves the evaporator clean



58°C Self-clean After the evaporator surface condenses, it rapidly cools down and causes frost to form, generating a strong cold expansion force that removes dirt, defrosts the surface, and washes it away. Then, the air conditioner rapidly heats up to a high temperature, with the maximum temperature reaching 58°C. The evaporator is subsequently dried, and high-temperature disinfection and sterilization take place.



Cold Plasma

Cold Plasma is a device that simultaneously ionizes the air using positive and negative high-voltage electrodes. This air ionization process results in positively charged ions entering the living space, which then attract hydrogen electrons from mold, viruses, and bacteria present in the air, ultimately causing their demise.



Anti Virus Filter

The anti-virus filter has a bacteriostatic rate of over 99% against bacteria and viruses.



3 in 1 Filter

Air travels through multiple filters and each has the function b provide you with better and healthier air.

DC Inverter



180° Sine Wave Sirair's inverter air conditioner incorporates the benchmark technology of 180° sine wave control technology. When compared to the 120° square wave technology, it offers better efficiency, reduced energy consumption, and improved stability and reliability.



Fast Cooling & Heating

After startup, the compressor engages in high-frequency operation and rapidly attains its maximum cooling (heating) capacity, achieving cooling in just 1 minute and heating in 3 minutes.



Wide Voltage Range

The Sirair inverter air conditioner features a wide voltage range of 135V-268V, making it suitable for regions with an unstable power supply.

Comfort



Turbo Mode

With this function, the air conditioner maximizes the cooling and heating capacity output, enabling the room to cool down or heat up more rapidly and reach the desired temperature in the shortest time possible.



Sleep Mode

In sleep mode, the indoor unit lowers the fan speed and deactivates the display light to prevent light and noise from disturbing the user's şleep, thereby creating a desirable environment for a good night's rest.

Comfort



5 Grades Indoor Fan Speeds

Remote control includes indoor speed options: strong, high, medium, low, and quiet.



I Feel

With a temperature sensor built into the remote controller, the air conditioner can detect the surrounding temperature of the controller. The I FEEL function allows the air conditioner to operate according to the ambient temperature around the remote controller.



3D Airflow

The louvers on the Sirair air conditioner can automatically swing both vertically and horizontally, allowing for precise control of the wind direction, which ensures even and widespread cooling.



Quiet Mode

In quiet mode, the air conditioner will operate with a super breeze setting to reduce the indoor unit's operating sound.

Energy Saving



Brand Compressor

Sirair Air Conditioning selects compressors from world-renowned brands such as GMCC and HIGHLY.



ECO

When the ECO mode is activated, the air conditioner will restrict the power input to conserve energy and improve the unit's cost-effectiveness. This offers a significant advantage for users seeking a comfortable cooling experience without concerns about the operating cost.



0.5W Standby

The digital green power design, industry-leading standby chip, and intermittent oscillation mode are employed to reduce the AC standby power consumption to 0.5W.

Smart



WIFI Control

CHANGHONG smart air conditioners can be controlled or scheduledfrom your phone no matter where you are. It's also compatible with the Amazon Echo and Google Homesmart-home systems, or CHANGHONG TV, allowing you to control your AC by using voice commands, makes our life simple and smart.



Offline Voice Control

CHANGHONG offline voice control technology, designed to solve users' pain points, completely offline voice analysis, network is not required, providing innovative solutions to make life better.

Convenience



Auto Restart

When the power is off, the AC unit will restore the previous function setting and will restart automatically when the power is on.



Auto Mode

In this mode, the air conditioner automatically adjusts the operating mode and set temperature according to the ambient temperature



Hidden LED Display

CHANGHONG modern large hidden display is perfect for checking your display conveniently. Moreover with Hidden Display feature, avoid light stimulation and take care of your sleep.



24 Hr Timer

The remote control adds a timing button, and the timer can be set arbitrarily in units of 1 hour within 1-24



Emergent Using

An emergency button is added on the main board of the air conditioner, so that the user can use the air conditioner in an emergency when the remote control is damaged r lost.



Memory

Louver Position After turning on or changing the mode, the last operating stateof the louver position will be automatically memorized, and the louver position will automatically return to the previous state.

Convenience



Independent Set through the remote control, enter the dehumidification mode run. Dehumidification



Dust Removal Reminder

When air conditioner runs for over 600 hours, the indoor unit will display "CL" to remind users to clean the filter. If you do not want to see the "CL" sign, just clean the filter and restart the AC.

Reliability



Self-diagnosis and Auto-protection

If the microcomputer in the air conditioner detects abnormal operations or component failures, it will automatically shut off and activate system protection. Additionally, an error or protection code will be displayed on the indoor unit for diagnostic purposes.



Error Alarm

If the air conditioner encounters any issues while running, an error or protection code will be displayed on the indoor unit.



Smart Defrosting During the heating process, the air conditioner intelligently assesses whether the external heat exchanger is frosted and will automatically initiate the defrosting operation based on the temperature changes of the indoor coil or the outdoor coil.



Heating

In the heating mode, the ambient temperature sensor is susceptible to the influence of accumulating hot air around the air conditioner, resulting in a detected temperature higher than Compensation the actual ambient temperature. The background program includes compensation to align the detected temperature as closely as possible with the true ambient temperature.



Dew Prevention In cooling and dehumidification mode, after the air swing operates at the angle conducive to condensation for a period, it will automatically return to the high air volume angle and run for some time to dry any condensation at the air outlet.



Anti-rust Design


The Sirair outdoor unit is constructed with double-sided galvanized thickened steel plate and is evenly coated with polymer anti-corrosion powder, ensuring long-term rust resistance for the



Thoughtful Packaging

The packaging box is designed to ensure that the air conditioner is delivered to consumers without any damage. This is achieved by simulating various road conditions with bumps and conducting high-altitude drop experiments.

Technical specifications

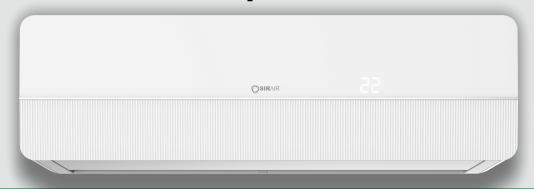

				Inverter	Inverter	Inverter	Inverter
				Cooling & Heating	Cooling & Heating	Cooling & Heating	Cooling & Heating
Model			9K	12K	18K	24K	
Climate type			TI	TI	TI	TI	
Panel				Sigma	Sigma	Sigma	Sigma
Power supply Ph-V-Hz			220-240V/50HZ	220-240V/50HZ	220-240V/50HZ	220-240V/50HZ	
Туре			Split	Split	Split	Split	
Power Supply Mode				Indoor	Indoor	Indoor	Indoor
Control type				Remote	Remote	Remote	Remote
	Cooling	Capacity	BTU	9000	12000	18000	24000
	Cooling	EER		Α	Α	Α	Α
	Heating	Capacity	BTU	9000	12000	18000	24000
		СОР		A++	A++	A++	A++
	Moisture removal			1	1.2	1.8	2.2
Max. input consumption			W	1217	1416	2110	2840
	Max. current		Α	5.7	6.6	9.9	13.3
Compressor	Туре			Rotary	Rotary	Rotary	Rotary
	Brand			GMCC	GMCC	SANYO	GMCC
	Locked rotor Amp(LRA)		Α	/	/	/	/
	Capacitor		uF	/	/	/	/
Indoor unit	Indoor fan motor	Brand		Welling/Broad-Ocean/Tongde/LT	Welling/Broad-Ocean/Tongde/LT	Welling/Broad-Ocean/Tongde/LT	Broad-ocean/LT
		Capacitor	uF	1.2	1.2	2	3
		Motor speed (TU/Hi/Mi/Lo)	RPM	1320	1320	1250	1280
	Indoor air flow		m3/h	500/450/400/350	550/500/450/400	820/720/620/520	1150/1080/1000/850
	Noise level		dB(A)	40/38/36/34	42/40/38/36	44/41/38/35	46/43/40/37
	Unit dimension (W*H*D)		mm	700*198*270	805*270*197	908*295*220	1025*319*223
	Packing (W*H*D)		mm	750*267*317	864*332*265	979*354*292	1102*395*305
Outdoor unit	Outdoor fan motor	Brand		Welling/Broad-Ocean	Welling/Broad-Ocean/Tongde/LT	Welling/Broad-Ocean	Welling/Broad-Ocean/LT
		Capacitor	uF	2.5	2.5	2.5	2.5
		Motor speed	Rpm	860	860	880	880
	Noise level		dB(A)	50	50	54	54
	Unit dimension (W*H*D) mm		mm	660*530*250	660*530*250	780*560*270	780*560*270
	Packing (W*H*D) mr		mm	768×575×338	768×575×338	889×612×359	889×612×359
	Refrigerant type			R410A	R410A	R410A	R410A
	Refrigerant charge Kg		Kg	0.61	0.68	1.15	1.35
Refrigerant pipe	Liquid side inch		1/4	1/4	1/4	1/4	
			inch	3/8	3/8	1/2	5/8
	Ambient Working Temperature Range(°C) Cooling-Outdoor			16~52	16~52	16~52	16~52
	Ambient Working Temperature Range(°C) Heating-Outdoor			-15~24	-15~24	-15~24	-15~24
	Max. refrigerant pipe length		m	9	12	12	15
			m	5	7	7	8

